



# Buzzi Unicem USA

## Greencastle, IN Cement Plant

### *An Environmental Product Declaration*



ASTM INTERNATIONAL  
Helping our world work better





## About this EPD

This is a cradle-to-gate environmental product declaration (EPD) for portland (Type I and Type III), blended (Type II) as well as masonry cements as produced by Lone Star Industries, Inc. d/b/a Buzzi Unicem USA at its Greencastle, IN plant. The results of the underlying LCA are computed with the North American (N.A.) version of the Global Cement and Concrete Association (GCCA) Industry EPD Tool for cement and concrete [1]. This tool and the underlying LCA model and database [2] have been previously verified to conform to the prevailing sub-product category rule (PCR) [3], ISO 21930:2017 (the core PCR) [4] as well as ISO 14020:2000 [5] and ISO 14040/44:2006 LCA standards [7], [8].

This EPD is certified by ASTM to conform to the Sub-Product Category Rule (PCR) referenced above, as well as to the requirements of ISO 14020, ISO 14025 [6], ISO 21930 and ASTM International's General Program Instructions [9]. This EPD is intended for business-to-business audiences.

## General Summary

### EPD Commissioner and Owner



### Buzzi Unicem USA Inc.

100 Brodhead Road  
Bethlehem, PA 18017-8935  
<https://www.buzziunicemusa.com>

The Greencastle Cement plant provided both LCI and meta-data for limestone extraction, clinker production and cement manufacture for reference year 2019. Buzzi Unicem USA also completed the LCA modeling within the GCCA EPD tool. The owner of the declaration is liable for the underlying information and evidence.

### Product Group and Name

*Cement, UN CPC 3744.*

### Product Definition

**Portland cement** is defined as a hydraulic cement produced by pulverizing clinker, consisting essentially of crystalline hydraulic calcium silicates, and usually containing one or more of the following: calcium sulfate, up to 5% limestone, and processing additions (NSF PCR 2021 [10], ASTM C150 [11]).

Portland Cement *Type I*—For use when the special properties specified for any other type are not required.

Portland Cement *Type II*—For general use, more especially when moderate sulfate resistance is desired.

Portland Cement *Type III*—For use when high early strength is desired.

Some cements are designated with a combined type classification, such as Type I/II, indicating that the cement meets the requirements of the indicated types and is being offered as suitable for use when either type is desired.

**Blended cement** is a hydraulic cement consisting of two or more inorganic constituents (at least one of which is not portland cement or portland cement clinker) which separately or in combination contribute to the strength gaining





properties of the cement, (made with or without other constituents, processing additions and functional additions, by intergrinding or other blending).

- Type IL (ASTM C595[13]) — is a Portland-limestone cement and is a hydraulic cement in which the limestone content is more than 5 % but less than or equal to 15 % by mass of the blended cement.

**Masonry cement** is hydraulic cement manufactured for use in mortars for masonry construction or in plasters, or both, which contains a plasticizing material and, possibly, other performance-enhancing addition(s). Mortar cements are produced in Type N, Type S, and Type M classifications for use in preparation of ASTM Specification C91

Product Category Rules (PCR)	NSF International, Product Category Rules for Preparing an Environmental Product Declaration for Portland, Blended Hydraulic, Masonry, Mortar, and Plastic (Stucco) Cements, V3.2, September 2021 [3].
Date of Issue & Validity Period	August 12, 2022 – 5 years
Declared Unit	1 metric ton of cement and 1 short ton of cement

## EPD and Project Report Information

Program Operator	ASTM International	
Declaration Number	EPD 356	
Declaration Type	Cradle-to-gate (modules A1 to A3). Facility and product-specific.	
Applicable Countries	United States	
Product Applicability	Portland cement is the basic ingredient of concrete. Concrete, one of the most widely used construction materials in the world, is formed when Portland cement creates a paste with water that binds with sand and rock to harden.	
Content of the Declaration	This declaration follows Section 9; Content of an EPD, NSF International, Product Category Rules for Preparing an Environmental Product Declaration for Portland, Blended Hydraulic, Masonry, Mortar, and Plastic (Stucco) Cements, V3.2, September 2020 [3].	
This EPD was independently verified by ASTM in accordance with ISO 14025 and the reference PCR:	Tim Brooke ASTM International 100 Barr Harbor Drive PO Box C700 West Conshohocken PA 19428-2959, USA <a href="mailto:cert@astm.org">cert@astm.org</a>	Thomas P. Gloria, Ph. D. Industrial Ecology Consultants 35 Bracebridge Rd. Newton, MA
Internal	External	X
Notes	The EPD results reported herein are computed using the N.A. GCCA Industry EPD tool for Cement and Concrete ( <a href="https://concrete-epd-tool.org">https://concrete-epd-tool.org</a> ).	
EPD Prepared by:	Athena Sustainable Materials Institute	





**Athena**  
Sustainable Materials  
Institute

280 Albert Street, Suite 404  
Ottawa, Ontario, Canada K1P 5G8  
[info@athenasmi.org](mailto:info@athenasmi.org)  
[www.athenasmi.org](http://www.athenasmi.org)

## PCR Information

Program Operator: NSF International

Reference PCR: Product Category Rules for Preparing an Environmental Product Declaration for Portland, Blended Hydraulic, Masonry, Mortar, and Plastic (Stucco) Cements, V3.2, September 2021[3].

PCR review was conducted by: Thomas P. Gloria, PhD (Chair), Industrial Ecology Consultants,  
Mr. Jack Geibig, EcoForm  
Mr. Bill Stough, Sustainable Research Group

## Buzzi Unicem USA & Production Facility

Buzzi Unicem USA, headquartered in Bethlehem, Pennsylvania, is one of the leading cement manufacturing companies in the US. Buzzi Unicem USA, which stems from the merger, early in 2004, of RC Cement (Buzzi Unicem SpA) and Lone Star Industries (Dyckerhoff) serves the Midwest, Southwest, Northeast and Southeast sections of the country.

The company's seven cement plants have a production capacity of approximately 9 million metric tons. The company produces cement at its facilities in Cape Girardeau, MO; Chattanooga, TN; Festus, MO; Greencastle, IN; Maryneal, TX; Pryor, OK and Stockertown, PA. Buzzi Unicem USA also operates 34 cement terminals across the country, which distribute its cement products to over 20 states. Buzzi Unicem USA has over 1,400 valued employees, and supplies portland and masonry cement products to construction industry.

Facility Name: Greencastle Cement Plant  
Buzzi Unicem USA  
3301 South County Rd 150W  
Greencastle, IN 46135

## Product Description

This EPD reports environmental transparency information for four cement types produced by Buzzi Unicem USA at its Greencastle, IN plant. Cements are hydraulic binders and are manufactured by grinding cement clinker and other main or minor constituents into a finely ground, usually grey colored mineral powder. When mixed with water, cement acts as a glue to bind together the sand, gravel or crushed stone to form concrete, one of the most durable, resilient and widely used construction materials in the world. The Table below sets out each cement type constituents and applicable standards. Cements are sold in bulk as well as packaged.

## Products and Standards

Inputs	Portland Type I/II ASTM C150	Portland Type III ASTM C150	Blended Type II ASTM C595	Masonry ASTM C91
Clinker	92%	96%	87%	65%
Gypsum	3%	4%	3%	3%







Limestone	5%	<1%	10%	33%
Other	<1%	<1%	<1%	<1%
<b>Total</b>	<b>100%</b>	<b>100%</b>	<b>100%</b>	<b>100%</b>

**Applicable Standards:**

ASTM C150 / C150M –Standard Specification for Portland Cement

ASTM C91 –Standard Specification for Mortar for Unit Masonry

ASTM C595 / C595M –Standard Specification for Blended Hydraulic Cement


AASHTO M 85Standard Specification for Portland Cement (ASTM Designation: C150 / C150M - 20)

## Declared Unit

The declared unit is one metric ton of cement. Results per short ton of cement are also provided.

## System Boundary

This is a cradle-to-gate EPD covering the production stage (A1-A3) as depicted in the figure below. The production stage includes extraction of raw materials (cradle) through the manufacture of cements ready for shipment (gate). The Greencastle cement plant sources its limestone supply from an adjacent quarry and ships its cements in bulk or bag.

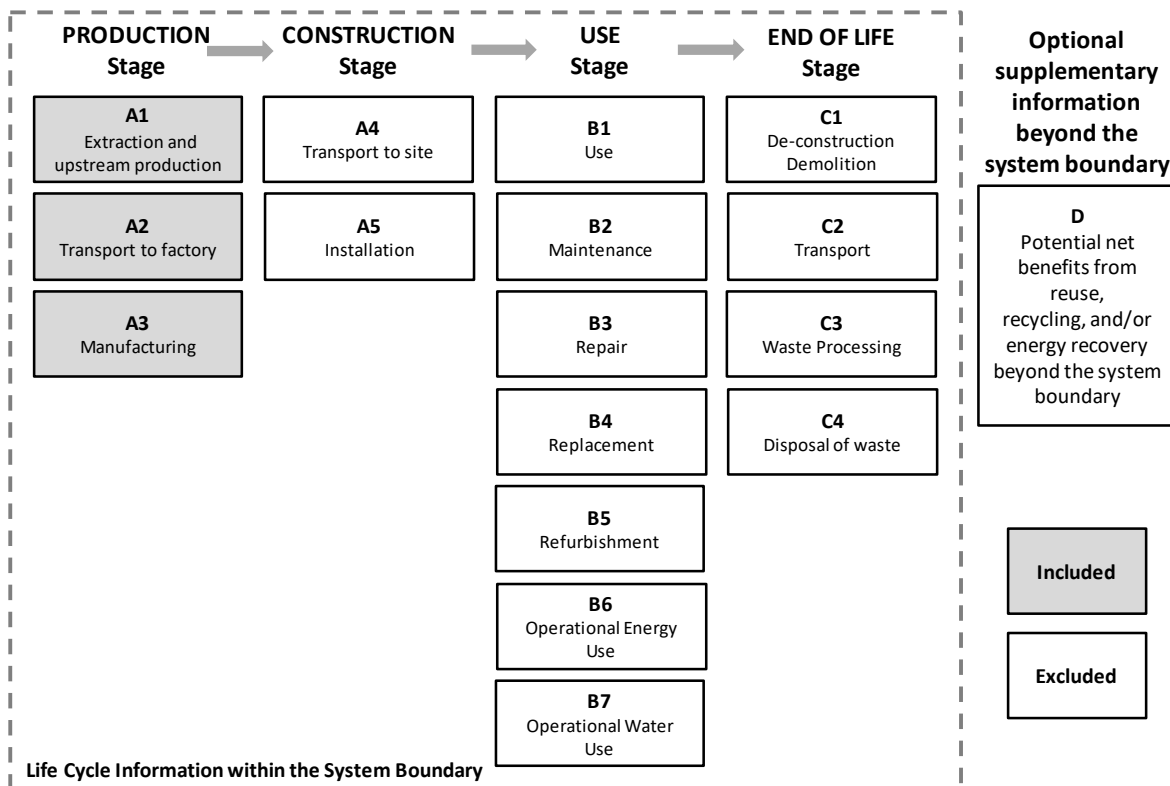

**Items excluded from the system boundary include:**

- Production, manufacture, and construction of manufacturing capital goods and infrastructure





- Production and manufacture of production equipment, delivery vehicles, and laboratory equipment
- Personnel-related activities (travel, furniture, and office supplies)
- Energy and water use related to company management and sales activities that may be located either within the factory site or at another location

### Cut-off Criteria

The cut-off criteria as per NSF PCR, Section 7.1.8 [3] and ISO 21930, 7.1.8 [4] were followed. Per ISO 21930, 7.1.8, all input/output data required were collected and included in the LCI modelling. No substances with hazardous and toxic properties that pose a concern for human health and/or the environment were identified in the framework of this EPD

### Data Collection

Gate-to-gate input/output flow data were collected for the following processes for the reference year 2019:

- Limestone quarry operations, clinker production and cement manufacture.

## Allocation Rules

Allocation of inventory flows and subsequently environmental impact is relevant when assets are shared between product systems. The allocation method prescribed by the PCR [3] is applied in the underlying LCA model. The sub-category PCR recognizes fly ash, furnace bottom ash, bypass dust, mill scale, polluted soils, spent catalyst, aluminum oxide waste, silica fume, granulated blast furnace slag, iron rich waste, cement kiln dust (CKD), flue gas desulfurization (FGD) gypsum, calcium fluoride rich waste and postconsumer gypsum as recovered materials and thus, the environmental impacts allocated to these materials are limited to the treatment and transportation required to use as a cement material input. Further, used tires, plastics, solvents, used oil and oily waste, coal/carbon waste, roofing asphalt, household refuse-derived waste, non-hazardous liquid waste, industrial sludge, and agricultural waste are considered non-renewable and/or renewable secondary fuels. Only the materials, water, energy, emissions, and other elemental flows associated with reprocessing, handling, sorting and transportation from the point of the generating industrial process to their use in the production process are considered. All emissions from combustion at the point of use are considered. For co-products, no credit is considered, and no allocation is applied. See the LCA model and LCA database reports of the N.A. version of GCCA's Industry Tool for EPDs of cement and concrete for more information [1 & 2].

## Data Quality Requirements and Assessment

Data Quality Requirements	Description
Technology Coverage	<p>Data represents the prevailing technology in use at the Greencastle facility. Whenever available, for all upstream and core material and processes, North American typical or average industry LCI datasets were utilized.</p> <p>The Greencastle plant utilizes a <i>semi-dry (wet) kiln technology</i>.</p> <p><i>Technological representativeness is characterized as "high".</i></p>
Geographic Coverage	<p>The geographic region considered is U.S.</p> <p><i>Geographical representativeness is characterized as "high".</i></p>





<b>Time Coverage</b>	<p>Activity (primary) data are representative of 2019 calendar year (12 months).</p> <ul style="list-style-type: none"> <li>- Greencastle limestone extraction,</li> <li>- Greencastle clinker production,</li> <li>- Greencastle cement manufacturing,</li> <li>- In-bound/out-bound transportation data - primary data collected for quarry site and cement manufacturing plant.</li> </ul> <p><i>Electricity resource mix is specific to the plant's power provider (2019) with the following make-up: 31% coal, 34% natural gas, 33% nuclear and 2% solar.</i></p> <p><i>Temporal representativeness is characterized as "high".</i></p>
<b>Completeness</b>	<p>All relevant, specific processes, including inputs (raw materials, energy and ancillary materials) and outputs (emissions and production volume) were considered and modeled in the GCCA Tool to complete production profile for Buzzi Unicem USA cement products. The Greencastle cement plant operates a continuous emissions monitoring system and reports emissions to the US EPA. These data for 2019 were drawn on in the completion of this EPD. The completeness of the foreground process chain in terms of process steps is rigorously assessed.</p>
<b>Consistency</b>	<p>To ensure consistency, cross checks of the energy demand and the calculated raw meal to clinker ratio against ranges reported in the WBCSD Cement Sustainability Initiative, Cement CO2 and Energy Protocol, v3.1 December, 2013 were conducted [15]. The LCA team conducted mass and energy balances at the facility level and selected process levels to maintain a high level of consistency</p>
<b>Reproducibility</b>	<p>External reproducibility is not possible as the source LCI data and subsequent LCA background reports are confidential.</p>
<b>Transparency</b>	<p>Activity datasets are disclosed in the project LCI compilation, and the background reports generated by the GCCA Tool.</p>
<b>Uncertainty</b>	<p>A <i>sensitivity check</i> was conducted relative to the <a href="#">PCA industry average</a> [16]. The variation across significant inputs were found to be well within the expected range and hence, there is high degree of confidence in the results.</p>

## Life Cycle Impact Assessment Results: Greencastle Plant

This section summarizes the production stage life cycle impact assessment (LCIA) results including resource use and waste generated metrics based on the cradle-to-gate life cycle inventory inputs and outputs analysis. The results are calculated based on 1 metric ton of each cement type as produced at the Greencastle plant. Appended to this report are results per short ton of each cement type.

It should be noted that LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks [4], [8]. Further, many LCA impact categories and inventory items are still emerging or under development and can have high levels of uncertainty that preclude international acceptance pending further development. Use caution when interpreting results for these categories – identified with an “\*” [3].

Only EPDs prepared from cradle-to-grave life-cycle results and based on the same function, quantified by the same functional unit, and taking account of replacement based on the product reference service life (RSL) relative to an assumed building service life, can be used to assist purchasers and users in making informed comparisons between products [3]. Environmental declarations from different programs may not be comparable [6]. EPDs are comparable only if they comply with ISO 21930, use the same, sub-





category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works [3&4].

## Production stage EPD Results – per metric ton

Impact category and inventory indicators	Unit	Portland Type I ASTM C150	Portland Type III ASTM C150	Blended Type IL ASTM C595	Masonry ASTM C91
Global warming potential, GWP 100, AR5	kg CO2 eq	1190	1234	1023	842
Ozone depletion potential, ODP	kg CFC-11 eq	1.99E-05	2.52E-05	1.94E-05	1.63E-05
Smog formation potential, SFP	kg O3 eq	47.2	48.3	40.5	34.8
Acidification potential, AP	kg SO2 eq	2.2	2.4	2.1	1.7
Eutrophication potential, EP	kg N eq	1.59	1.85	1.53	1.19
Abiotic depletion potential for non-fossil mineral resources, ADP elements*	kg Sb eq	1.79E-04	2.13E-04	1.74E-04	1.81E-04
Abiotic depletion potential for fossil resources, ADP fossil*	MJ LHV	254	285	246	231
Renewable primary resources used as an energy carrier (fuel), RPRE*	MJ LHV	64	75	61	223
Renewable primary resources with energy content used as material, RPRM*	MJ LHV	1	7	0	303
Non-renewable primary resources used as an energy carrier (fuel), NRPRE*	MJ LHV	5160	5875	4940	3932
Non-renewable primary resources with energy content used as material, NRPRM*	MJ LHV	<1	1	0	46
Secondary materials, SM*	kg	46	70	43	38
Renewable secondary fuels, RSF *	MJ LHV	174	176	164	120
Non-renewable secondary fuels, NRSF *	MJ LHV	2039	2057	1917	1407
Recovered energy, RE*	MJ LHV	0	0	0	0
Consumption of freshwater, FW*	m3	0.6	0.8	0.6	0.7
Hazardous waste disposed, HWD*	kg	0.2	0.2	0.2	0.1
Non-hazardous waste disposed, NHWD *	kg	26.6	26.8	25.0	18
High-level radioactive waste, conditioned, to final repository, HLRW*	kg	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>







Intermediate- and low-level radioactive waste, conditioned, to final repository, ILLRW*	kg	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>
Components for re-use, CRU*	kg	0	0	0	0
Materials for recycling, MFR*	kg	0.5	0.5	0.4	0.3
Materials for energy recovery, MER*	kg	0.1	0.1	0.1	0.1
Recovered energy exported from the product system, EE*	MJ LHV	0	0	0	0
Global warming potential - biogenic, GWPbio*	kg CO <sub>2</sub> eq	0.09	0.09	0.08	0.11
Emissions from calcination*	kg CO <sub>2</sub> eq	507	512	477	350
Emissions from combustion of waste from renewable sources*	kg CO <sub>2</sub> eq	<1	<1	<1	<1
Emissions from combustion of waste from non-renewable sources*	kg CO <sub>2</sub> eq	172	173	161	118

Table Notes:

x<sup>1)</sup> – The GCCA EPD Tool does not support these indicators.

\* Use caution when interpreting results for these categories

## LCA Interpretation

The Manufacturing module (A3) drives most of the potential environmental impacts. Manufacturing impacts are primarily driven by energy use (electricity and thermal fuels) during the pyroprocessing of limestone in the production of clinker. Clinker content in cement similarly defines the relative environmental profile of the final cement product. Raw material extraction (A1) is the second largest contributor to the Production stage EPD results, followed by transportation (A2).

## Additional Environmental Information

The Greencastle plant started producing cement on this property in 1919. In 1969, manufacturing operations were relocated to their current location and the five original kilns were replaced by a single long wet kiln. The long wet kiln was updated to semi-dry kiln in 2000. In 2004, the plant became part of Buzzi Unicem USA.

In 1992, the plant constructed a hazardous waste fuels handling facility. Today both liquid and solid waste fuels comprise up to 50% of the fuel fed to the kiln, conserving traditional fossil fuels such as coal and petroleum coke. Cement from the facility is shipped in bulk via trucks or railcars or packaged into bags.

### Environmental Protection and Equipment

The plant has a long-standing partnership with the People Pathways organization, developing and maintaining approximately 18 miles of walking trails in Putnam County, including a 3.5 mile trail adjacent to the plant property.





Air pollution control equipment in use at the Greencastle plant includes an ESP, baghouses, and low NOx burners for emission controls.

## References

1. Global Cement and Concrete Association (GCCA) and Portland Cement Association (PCA), *GCCA Industry EPD Tool for Cement and Concrete (V3.0), Users Manual, North American version*, Prepared by Quantis, April 2021. <https://demo.gcca.quantis.solutions/us>
2. Global Cement and Concrete Association (GCCA) 2021. LCA Database, North American version, Prepared by Quantis, April 2021
3. NSF International, Product Category Rule Environmental Product Declarations, PCR for Portland, Blended, Masonry, Mortar, and Plastic (Stucco) Cements, V3.2, September 2021.
4. ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.
5. ISO 14020:2000 Environmental labels and declarations — General principles
6. ISO 14025:2006 Environmental labeling and declarations - Type III environmental declarations - Principles and procedures.
7. ISO 14040:2006/Amd1:2020 Environmental management - Life cycle assessment - Principles and framework.
8. ISO 14044:2006/Amd1:2017/Amd2:2020 Environmental management - Life cycle assessment - Requirements and guidelines.
9. ASTM General Program Instructions. V.8.0, April 29, 2020.
10. NSF International, Product Category Rule Environmental Product Declarations, PCR for Concrete, V2.1, August 2021.
11. ASTM C150 / C150M – 20 Standard Specification for Portland Cement.
12. ASTM C91 - Standard Specification for Mortar for Unit Masonry
13. ASTM C595 / C595M - 21 Standard Specification for Blended Hydraulic Cements
14. AASHTO M 85-21 Standard Specification for Portland Cement (ASTM Designation: C150/C150M-21) <https://www.cement-co2-protocol.org/en/>
15. WBCSD CSI 2013: CO<sub>2</sub> and Energy Protocol Version 3.1 of 9 December 2013. <https://www.cement-co2-protocol.org/en/>
16. Portland Cement Association Environmental Product Declaration – Portland Cement, ASTM International, March 12, 2021. [https://www.astm.org/CERTIFICATION/DOCS/634.EPD\\_for\\_Portland\\_Athena\\_Final\\_revised\\_04082021.pdf](https://www.astm.org/CERTIFICATION/DOCS/634.EPD_for_Portland_Athena_Final_revised_04082021.pdf)





## Annex A: Production stage EPD Results – per short ton

Impact category and inventory indicators	Unit	Portland Type I/II ASTM C150	Portland Type III ASTM C150	Blended Type IL ASTM C595	Masonry ASTM C91
Global warming potential, GWP 100, AR5	kg CO2 eq	1079	1119	1019	764
Ozone depletion potential, ODP	kg CFC-11 eq	1.80E-05	2.28E-05	1.76E-05	1.47E-05
Smog formation potential, SFP	kg O3 eq	42.8	43.8	40.5	31.6
Acidification potential, AP	kg SO2 eq	1.99	2.13	1.90	1.50
Eutrophication potential, EP	kg N eq	1.44	1.67	1.39	1.08
Abiotic depletion potential for non-fossil mineral resources, ADP elements*	kg Sb eq	1.62E-04	1.93E-04	1.58E-04	1.64E-04
Abiotic depletion potential for fossil resources, ADP fossil*	MJ LHV	230	258	223	209
Renewable primary resources used as an energy carrier (fuel), RPRE*	MJ LHV	58	68	55	202
Renewable primary resources with energy content used as material, RPRM*	MJ LHV	0.8	6.4	0	275
Non-renewable primary resources used as an energy carrier (fuel), NRPRE*	MJ LHV	4681	5330	4481	3567
Non-renewable primary resources with energy content used as material, NRPRM*	MJ LHV	0.1	1.0	0	41
Secondary materials, SM*	kg	41.5	63.6	39.0	34.2
Renewable secondary fuels, RSF *	MJ LHV	158	159	149	109
Non-renewable secondary fuels, NRSF *	MJ LHV	1850	1866	1739	1276
Recovered energy, RE*	MJ LHV	0	0	0	0
Consumption of freshwater, FW*	m3	0.6	0.7	0.6	0.7
Hazardous waste disposed, HWD*	kg	0.2	0.2	0.2	0.1
Non-hazardous waste disposed, NHWD *	kg	24.1	24.3	22.7	16.6
High-level radioactive waste, conditioned, to final repository, HLRW*	kg	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>





# Buzzi Unicem USA

*An Environmental Product Declaration  
In accordance with ISO 14025 and 21930*

Intermediate- and low-level radioactive waste, conditioned, to final repository, ILLRW*	kg	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>	x <sup>1)</sup>
Components for re-use, CRU*	kg	0	0	0	0
Materials for recycling, MFR*	kg	0.4	0.4	0.4	0.3
Materials for energy recovery, MER*	kg	0.1	0.1	0.1	0
Recovered energy exported from the product system, EE*	MJ LHV	0	0	0	0
Global warming potential - biogenic, GWPbio*	kg CO <sub>2</sub> eq	0.08	0.09	0.02	0.10
Emissions from calcination*	kg CO <sub>2</sub> eq	460	464	433	317
Emissions from combustion of waste from renewable sources*	kg CO <sub>2</sub> eq	0.03	0.03	0.03	0.02
Emissions from combustion of waste from non-renewable sources*	kg CO <sub>2</sub> eq	156	157	146	107

Table Notes:

x<sup>1)</sup> – The GCCA EPD Tool does not support these indicators.

\* Use caution when interpreting results for these categories

